



# Meta Air Troffer (12x4) Independently Verified Product Carbon Footprint (PCF) Full Report

10 June 2026

# Table of Contents

<b>Table of contents</b>	<b>2</b>
<b>Document overview</b>	<b>3</b>
Benefits of using this Product Carbon Footprint	3
Notes for readers	3
<b>Product Carbon Footprint results at a glance</b>	<b>4</b>
Total upfront carbon (A1-A3)	4
Data confidence	4
Carbon impact (Fossil)	4
Carbon by lifecycle stage	4
<b>Report information</b>	<b>5</b>
<b>Company information</b>	<b>5</b>
<b>Product information</b>	<b>6</b>
<b>Technical information</b>	<b>7</b>
Report boundary	7
Process flow diagram	8
<b>Results</b>	<b>9</b>
Total upfront carbon (A1-A3)	9
Carbon intensity by life cycle stage	9
Carbon intensity by raw material	9
Carbon intensity by transport type	9
Carbon intensity by energy source	10
Carbon intensity by packaging material	10
Carbon intensity by process emissions	10
Carbon intensity by waste treatment	10
<b>References</b>	<b>12</b>

# Document overview

This Product Carbon Footprint (PCF) report provides a transparent and verified account of the greenhouse gas (GHG) emissions associated with Meta Air Troffer (12x4).

This report has been prepared by the declaration owner using primary and secondary data. The report conforms to international standard ISO 14067 and it is compiled using a range of high quality data sources. The results of this report has been reviewed by a suitably qualified Rebuilt LCA professional and verified in accordance to ISO 14064-3. This report demonstrates the declaration owner's commitment to transparency, sustainability excellence and continuous improvement.

Users of this PCF are responsible for evaluating the applicability of the data for their intended purposes.

---

## Benefits of using this Product Carbon Footprint

This document can be used to:

- Inform your customers about the embodied emissions in your products
- Meet procurement and tender requirements
- Identify hot spots and opportunities for making improvements in carbon intensity over time
- Input into mandatory corporate carbon disclosure reporting.

## PCFs and EPDs: making comparisons

Product Carbon Footprints (PCFs) and Environmental Product Declarations (EPDs) are both based on ISO 14044 Life Cycle Assessment methodology.

The key distinction is scope:

- An EPD reports multiple environmental impact categories.
- A PCF reports greenhouse gas emissions only.

Because both apply the same methodological backbone, carbon results are technically interoperable when:

- The same lifecycle modules are included
- The same Product Category Rules are applied
- Functional performance are similar

Users should refer to the declared system boundary in this report before undertaking comparisons.

# Results at a glance

## Meta Air Troffer (12x4)

Novon Lighting


Total upfront carbon (Fossil)  
(A1-A3)

**25.55**

Carbon Footprint  
kg CO<sub>2</sub>e /unit

## Carbon impact (Fossil)

Relative carbon impact of the components of the product

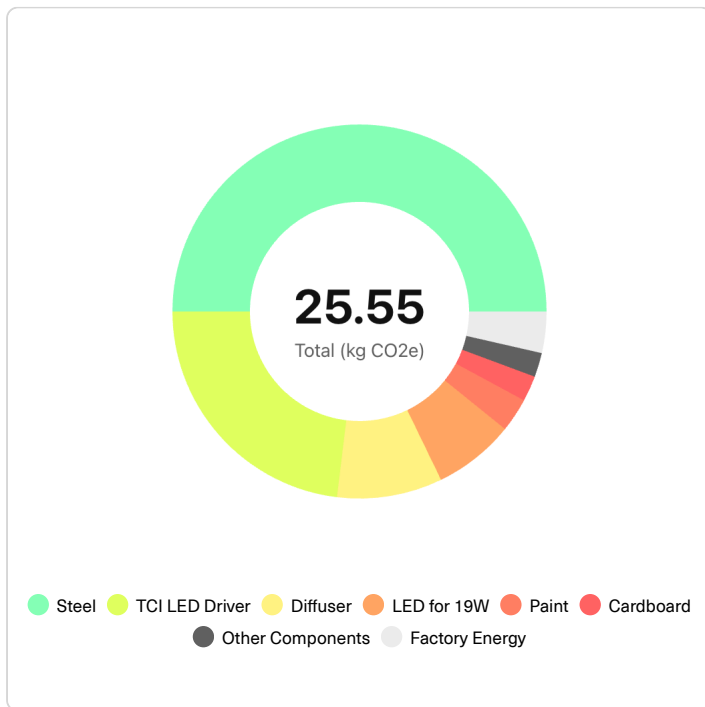

Component name	Weight (kg)	kg CO <sub>2</sub> e	% of total kg CO <sub>2</sub> e
TCI LED Driver	0.07	5.89	23.07
LED for 19W	< 0.01	1.79	7.01
Copper	0.01	0.04	0.15
Stainless Steel	< 0.01	< 0.01	0.02
Plastic	0.08	0.49	1.92
Steel	3.60	12.78	50.01
Paint	0.20	0.75	2.93
Diffuser	0.30	2.33	9.11
Bubble Wrap	< 0.01	< 0.01	< 0.01
Cardboard	0.50	0.57	2.21
Factory Energy	0.00	0.91	3.57
	<b>Total (kg)</b>	<b>Total (kg CO<sub>2</sub>e)</b>	
	4.77	25.55	

## Carbon intensity by life cycle stage

Carbon impact from raw materials (A1), transport to factory (A2), and production activities (A3)

Type	A1 (kgCO <sub>2</sub> e)	A2 (kgCO <sub>2</sub> e)	A3 (kgCO <sub>2</sub> e)
Fossil	23.98	0.08	1.49
Biogenic	< 0.01	0.00	-0.33
Luluc	< 0.01	0.00	0.02
	<b>Total (kgCO<sub>2</sub>e)</b>	<b>Total (kgCO<sub>2</sub>e)</b>	<b>Total (kgCO<sub>2</sub>e)</b>
	23.98	0.08	1.18

# Report information

Current version	Version 1
Publication date	June 10, 2026
Valid until	June 10, 2031
Independently verified	Declaration owner generated report Reviewed and verified by Rebuilt
Verifier contact	www.rebuilt.eco verified@rebuilt.eco
Geographic scope	This claim covers production in Australia
Goal of study	Identification of Hotspots, Holistic View
Intended users	Architect / Engineer / Specifier
Data collection period	1 July 2024 - 30 June 2025
Standards compliance	ISO 14040, ISO 14044, ISO 14064-3, ISO 14067, ISO 14071
Product Category Rules (PCR)	EN 15804+A2:2019

## Verification and Assurance

This Product Carbon Footprint has undergone:

- Automated validation checks for completeness and reasonableness
- Data Quality Healthcheck assessment
- Independent review by a qualified Life Cycle Assessment practitioner
- Risk-based assessment where material risks or outlier results were identified
- Verification aligned with ISO 14064-3

Verification constitutes limited assurance appropriate to carbon-only disclosure.

All documentary evidence provided by the declaration owner has been assessed and evaluated against EN 15804+A2 and PACT Framework v3 data quality requirements. Supporting documentation is retained and available upon request for audit or regulatory review.

This PCF report has been created and verified in accordance with:



## Declaration owner

Declaration owner	Novon Lighting
Company description	-
Company location	Arndell Park, Australia
Manufacturing facility	Novon @ Arndell Park
Manufacturing location	Arndell Park, Australia

This document confirms that the Product Carbon Footprint presented in this report has been prepared and verified in accordance with recognised international standards for Life Cycle Assessment and carbon footprinting methodologies.

### The assessment:

- Applies the principles and framework of ISO 14040 and ISO 14044
- Quantifies greenhouse gas emissions in accordance with ISO 14067
- Follows Product Category Rules EN 15804+A2:2019 where applicable
- Has been reviewed and verified in accordance with ISO 14064-3

The results represent the global warming potential (GWP) of the product for the lifecycle stages specified within this report. It does not constitute a multi-impact Environmental Product Declaration under ISO 14025.


Where lifecycle modules, Product Category Rules and system boundaries are equivalent, the GWP results disclosed in this report are methodologically aligned with those presented in Environmental Product Declarations.

Verification has been conducted by a qualified Life Cycle Assessment practitioner. The verification process includes review of documentary evidence, assessment of data quality and consistency, and evaluation of methodological conformance.

The level of assurance provided is limited assurance appropriate to carbon-only disclosure.

Supporting documentation and evidence are retained and may be made available for audit or regulatory review upon request.

Based on the provided evidence and data input by the declaration owner, the PCF has been reviewed to meet the requirements of ISO 14067:2018 and we conclude that no evidence of non-conformance was observed during the review process, hence the PCF meets a limited level of assurance.

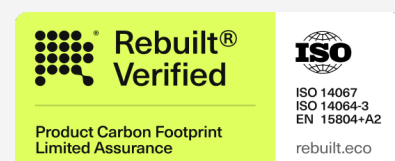

# Product information




Product name	Meta Air Troffer (12x4)
SKU	MET00CB06DD
Description	<p>The Meta Air provides a soft, low-glare illumination via a curved high transmission diffuser. Suitable for a variety of applications including offices, schools, healthcare facilities, and retail spaces. It is designed with high efficacy of 150lm/w ensuring long-lasting performance and energy efficiency. The fitting is manufactured in Sydney at Novon's manufacturing facility in Blacktown.</p> <p>The fitting range is available in multiple wattage variations, from 19W to 27W. The current Product Carbon Footprint calculation has been completed for the 19W version of the fitting. For other wattage variations within the range, slight adjustments would be required to reflect differences in component size, material quantities and product weight.</p> <p>Novon has purchased 50% GreenPower and carbon offset for the manufacturing energy used in FY2024/2025.</p>
Net weight (kg) per declared unit	4.28
Declared unit	1 unit
	For the purposes of this report, declared unit is taken to be an individual unit as sold.
Recycled content	18.56%
ANZSIC	2432
UNICLASS code	Pr_70_70_48

# Technical information

## Report boundary

This declaration shows the global warming potential (GWP) of the greenhouse gases embodied in this product, expressed in kilograms of carbon dioxide and equivalent gasses with global warming potential (kgCO<sub>2</sub>-e) and is based on the results of a pre-verified LCA performed in accordance with ISO14067 process and procedure as well as ISO14025 and nominated PCR EN15804.

NOTE: This declaration is limited to the life cycle stages shown in the table below.

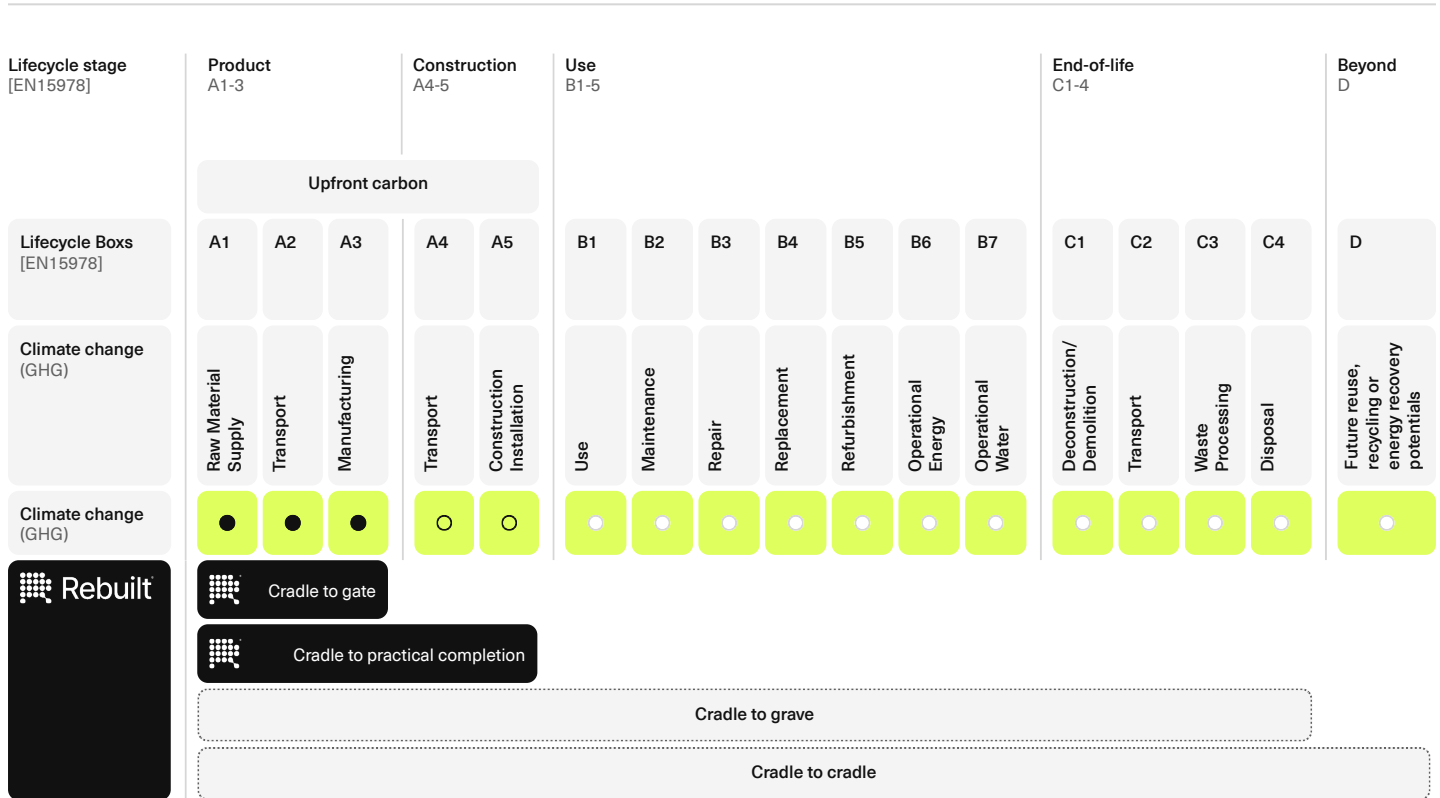

### A1 - Raw Material Extraction

The raw materials stage also called background or upstream covers the extraction and production of the raw materials needed to manufacture the product. It includes the processing of the extracted raw material to the point where it can be made into a recognisable part.

### A2 - Transport Raw Material to Factory

This stage outlines the calculation of CO<sub>2</sub> emissions (Stage A2) for transporting raw materials to the factory. It considers transport modes, distances travelled, and material weights to calculate emissions.

### A3 - Manufacturing

Converting raw materials into parts and made into the final product. It considers energy usage, packaging, process emissions and production waste.

### A4 - Transport to Site

Not reported as part of this scope

### A5 - Construction & Installation

Not reported as part of this scope

### B - Use Phase

Not reported as part of this scope

### C - End of Life


Not reported as part of this scope

### D - Beyond

Not reported as part of this scope

# Technical information (continued)

## Process flow diagram

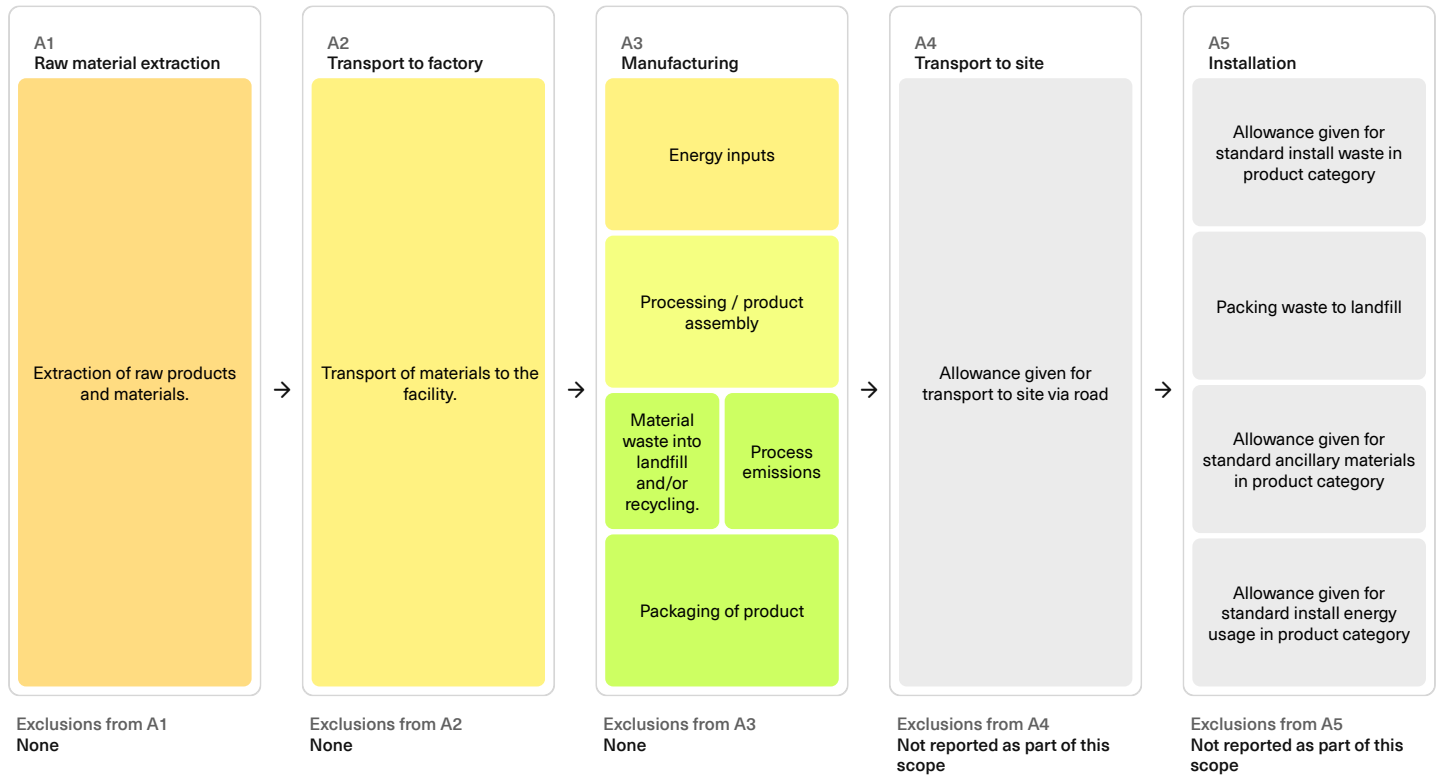

## Cut-off criteria

Individual processes may be excluded if their contributions to the total system's environmental impact are less than 1%. The aggregate cut-off criteria of this PCF follows PCR 2019:14 guideline where a minimum of 95% of total input (mass and energy) for each life cycle stage are included. Exclusions from the PCF is outlined in "Data Assumptions, Choices and Limitations".

The use stage is excluded from the study due to the uncertainty related to the multiple possible applications of the products assessed.

The following processes were left out of the system boundaries, in conformity to usual practices in carbon footprinting: labor, commuting of workers and administrative work.

## Allocation procedures

The allocation method for this PCF is based on a physical (mass) basis. The energy used by the product is allocated by normalising the total energy used in the factory to the total mass of the product to the total production mass output from the same factory.

## Intended use of this PCF

This declaration is suitable for use in:

- NABERS Embodied Carbon Rating
- Green Star Responsible Products and Upfront Carbon credits
- Scope 3 reporting
- Australian Sustainability Reporting Standards (ASRS) contexts
- Government procurement sustainability requirements

Where a contract explicitly requires a Type III Environmental Product Declaration under ISO 14025, a full EPD may be required.

# Results

Total upfront carbon (Fossil)  
(A1-A3)

**25.55**

Carbon Footprint  
kg CO<sub>2</sub>e /unit

## Carbon intensity by life cycle stage

Type	A1 (kgCO <sub>2</sub> e)	A2 (kgCO <sub>2</sub> e)	A3 (kgCO <sub>2</sub> e)
Fossil	23.98	0.08	1.49
Biogenic	< 0.01	0.00	-0.33
Luluc	< 0.01	0.00	0.02
	Total (kgCO <sub>2</sub> e)	Total (kgCO <sub>2</sub> e)	Total (kgCO <sub>2</sub> e)
	23.98	0.08	1.18

## Carbon intensity by raw material

Material	GWP Fossil (kgCO <sub>2</sub> e)	GWP Biogenic (kgCO <sub>2</sub> e)	GWP Luluc (kgCO <sub>2</sub> e)	GWP Total (kgCO <sub>2</sub> e)
TCI LED Driver	5.87	0.00	0.00	5.87
LED for 19W	1.79	0.02	< 0.01	1.81
Copper	0.04	0.00	0.00	0.04
Stainless Steel	< 0.01	< 0.01	< 0.01	< 0.01
Plastic	0.49	< 0.01	< 0.01	0.49
Steel	12.75	-0.00	0.00	12.75
Paint	0.75	-0.01	< 0.01	0.74
Diffuser	2.28	-0.00	< 0.01	2.28
	Total (kgCO <sub>2</sub> e)	Total (kgCO <sub>2</sub> e)	Total (kgCO <sub>2</sub> e)	Total (kgCO <sub>2</sub> e)
	23.98	< 0.01	< 0.01	23.98

## Carbon intensity by transport type

Material	Transport mode	GWP Fossil (kgCO <sub>2</sub> e)	GWP Biogenic (kgCO <sub>2</sub> e)	GWP Luluc (kgCO <sub>2</sub> e)	GWP Total (kgCO <sub>2</sub> e)
TCI LED Driver	Multi-leg transport	0.02	0.00	0.00	0.02
LED for 19W	Multi-leg transport	< 0.01	0.00	0.00	< 0.01
Copper	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Stainless Steel	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Plastic	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Bubble Wrap	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01

## Results (Continue)

Steel	By rail	0.01	0.00	0.00	0.01
Paint	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Cardboard	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Diffuser	Multi-leg transport	0.05	0.00	0.00	0.05
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		0.08	0.00	0.00	0.08

### Carbon intensity by energy source

Energy type	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Natural gas from grid	0.04	0.00	0.00	0.04
Purchased from grid (low voltage)	0.87	0.00	0.00	0.87
On-site solar (PV)	0.00	0.00	0.00	0.00
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		0.91	0.00	0.91

### Carbon intensity by packaging material

Material	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Bubble Wrap	< 0.01	-0.00	< 0.01	< 0.01
Cardboard	0.57	-0.34	0.02	0.25
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		0.57	-0.34	0.25

### Carbon intensity by process emissions

Material	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		0.00	0.00	0.00

### Carbon intensity by waste treatment

Material	Waste treatment type	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Steel	recycling, steel/iron	0.01	< 0.01	< 0.01	0.02
TCI LED Driver	N/A	0.00	0.00	0.00	0.00
LED for 19W	N/A	0.00	0.00	0.00	0.00
Copper	N/A	0.00	0.00	0.00	0.00
Stainless Steel	N/A	0.00	0.00	0.00	0.00
Plastic	N/A	0.00	0.00	0.00	0.00

## Results (Continue)

Paint	N/A	0.00	0.00	0.00	0.00
Diffuser	N/A	0.00	0.00	0.00	0.00
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		0.01	< 0.01	< 0.01	0.02

# References

- ISO 14040:2006+A1:2020 - Environmental management - Life cycle assessment - Principles and framework
- ISO 14044:2006+A2:2020 - Environmental management - Life cycle assessment - Requirements and guidelines
- ISO 14067:2018 (First Edition) - Greenhouse gases - Carbon footprint of products - Requirements and guidelines for quantification
- EN 15804:2012+A2:2019 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- Australian National Life Cycle Inventory Database (AusLCI) version 1.42 (May 2023)
- ecoinvent database v3.11 (November 2024)
- Australian National Greenhouse Accounts Factors 2024