



Delta 135 Ratchet High Back Independently Verified Product Carbon Footprint (PCF) Full Report

20 February 2026

Table of Contents

Table of contents	2
Document overview	3
Benefits of using this Product Carbon Footprint	3
Notes for readers	3
Product Carbon Footprint results at a glance	4
Total upfront carbon (A1-A3)	4
Data confidence	4
Carbon impact (Fossil)	4
Carbon by lifecycle stage	4
Report information	5
Company information	5
Product information	6
Technical information	8
Report boundary	8
Process flow diagram	9
Results	10
Total upfront carbon (A1-A3)	9
Carbon intensity by life cycle stage	9
Carbon intensity by raw material	10
Carbon intensity by transport type	10
Carbon intensity by energy source	11
Carbon intensity by packaging material	11
Carbon intensity by process emissions	11
Carbon intensity by waste treatment	11
References	13

Document overview

This Product Carbon Footprint (PCF) report provides a transparent and verified account of the greenhouse gas (GHG) emissions associated with Delta 135 Ratchet High Back.

This report has been prepared by the declaration owner using primary and secondary data. The report conforms to international standard ISO 14067 and it is compiled using a range of high quality data sources. The results of this report has been reviewed by a suitably qualified Rebuilt LCA professional and verified in accordance to ISO 14064-3. This report demonstrates the declaration owner's commitment to transparency, sustainability excellence and continuous improvement.

Users of this PCF are responsible for evaluating the applicability of the data for their intended purposes.

Benefits of using this Product Carbon Footprint

This document can be used to:

- Inform your customers about the embodied emissions in your products
- Meet procurement and tender requirements
- Identify hot spots and opportunities for making improvements in carbon intensity over time
- Input into mandatory corporate carbon disclosure reporting.

PCFs and EPDs: making comparisons

Both Product Carbon Footprints (PCFs) and Environmental Product Declarations (EPDs) are based on lifecycle assessment methodologies (ISO 14044), so their results are technically interoperable. However, comparisons should be approached with care:

- Data sources differ. Even within the same product category, PCFs and EPDs may draw on different reference datasets, assumptions, or cut-off rules, leading to variation in results.
- Rules matter. Results are only directly comparable if they apply the same Product Category Rules (PCRs), which set the boundaries and methods for assessment.
- Timing matters. PCFs and EPDs last for five years. Assessments carried out at different times may reflect changes in datasets, methodologies, or manufacturing processes.
- Lifecycle stages vary. Not all PCFs and EPDs cover the same modules (e.g. raw materials, manufacturing, transport, use, end-of-life). Different system boundaries can significantly affect results. Use the breakdown tables to compare like-for-like.
- Detail drives accuracy. Expert interpretation is often needed to judge whether results are genuinely comparable and to avoid misleading conclusions.
- Project context is key. The most meaningful comparison comes from assessing products in the context of the whole project or structure, not in isolation.

Results at a glance

Delta 135 Ratchet High Back

Chair Solutions Pty Ltd



Total upfront carbon (Fossil)
(A1-A3)

62.39

Carbon Footprint
kg CO₂e /Delta 135 Chair

Carbon impact (Fossil)

Relative carbon impact of the components of the product

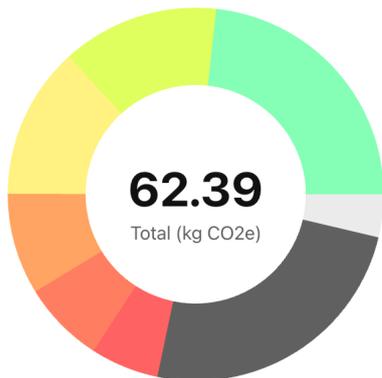

Component name	Weight (kg)	kg CO ₂ e	% of total kg CO ₂ e
Plywood in seat	1.55	1.93	3.09
Ratchet Back Bar	1.60	4.44	7.12
Fabric	0.30	1.25	2.00
Back Inner Plastic PPK20	0.80	3.67	5.88
Gas strut	1.20	3.33	5.34
Back Outer Plastic	0.55	2.52	4.04
Gas Dust Cover	0.09	0.40	0.64
Seat Outer Plastic PP05	0.60	2.71	4.34
5 Star Base	1.60	14.51	23.25
Castors	0.60	5.48	8.78
Powder coating on steel components (300mm x 200mm)	< 0.01	0.04	0.07
3 Lever Mechanism - Minus Powder Coating	3.04	8.44	13.52
Paddles	0.70	3.10	4.97
Chair Foam	1.60	8.22	13.18
Plastic Bag	0.30	0.04	0.06
Factory Energy	0.00	2.32	3.71
	Total (kg)	Total (kg CO₂e)	
	14.53	62.39	

Carbon intensity by life cycle stage

Carbon impact from raw materials (A1), transport to factory (A2), production activities (A3), transport to site (A4), and installation (A5).

Type	A1 (kgCO ₂ e)	A2 (kgCO ₂ e)	A3 (kgCO ₂ e)
Fossil	57.47	2.57	2.36

Biogenic	-1.80	0.00	< 0.01
Luluc	0.04	0.00	< 0.01
	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
	55.71	2.57	2.36

Report information

Publication date	February 20, 2026
Valid until	February 20, 2031
Independently verified	Declaration owner generated report Reviewed and verified by Rebuilt
Verifier contact	www.rebuilt.eco verified@rebuilt.eco
Geographic scope	This claim covers production in Australia
Data collection period	1 July 2024 - 30 June 2025
Standards compliance	ISO 14040, ISO 14044, ISO 14064-3, ISO 14067, ISO 14071
Product Category Rules (PCR)	EN 15804+A2:2019

This PCF report has been created and verified in accordance with:



Company information

Declaration owner	Chair Solutions Pty Ltd
Company description	-
Company location	Northgate, Australia
Manufacturing facility	QLD Chair Solutions Pty Ltd
Manufacturing location	Northgate, Australia

Product information




Product name	Delta 135 Ratchet High Back
SKU	DLT135H
Description	<p>This PCF is for our Delta 135 Chairs manufactured at our Brisbane Facility</p> <p>The Delta 135 Chair is the ultimate traditional ergonomic all-rounder — trusted, tested, and tailored to accommodate every body type. The Delta Range offers a variety of back and seat sizes that can be customised to fit individuals of all shapes and sizes, ensuring optimal comfort and support.</p> <ul style="list-style-type: none">* 3 lever heavy duty ratchet mechanism — providing fully ergonomic support for multiple types of users* Seat height, back and seat tilt and ratchet back height adjustability* Comfortable and long-lasting components made for severe Heavy-Duty use* Locally made moulded foam to ensure comfort and durability* Suited for commercial office or domestic use <p>We're invested in the future of our industry, and that means being wholly committed to sustainability. Our products are crafted with environmentally friendly materials, made to be recycled at the end of their life. We also offer a hassle-free take-back service, making it simpler than ever to make the sustainable choice.</p>
Net weight (kg) per declared unit	14.24
Declared unit	1 unit
	For the purposes of this report, declared unit is taken to be an individual unit as sold.
Recycled content	-
ANZSIC	C
UNICLASS code	EF_85_45

Technical information

Report boundary

This declaration shows the global warming potential (GWP) of the greenhouse gases embodied in this product, expressed in kilograms of carbon dioxide and equivalent gasses with global warming potential (kgCO₂-e) and is based on the results of a pre-verified LCA performed in accordance with ISO14067 process and procedure as well as ISO14025 and nominated PCR EN15804.

NOTE: This declaration is limited to the life cycle stages shown in the table below.

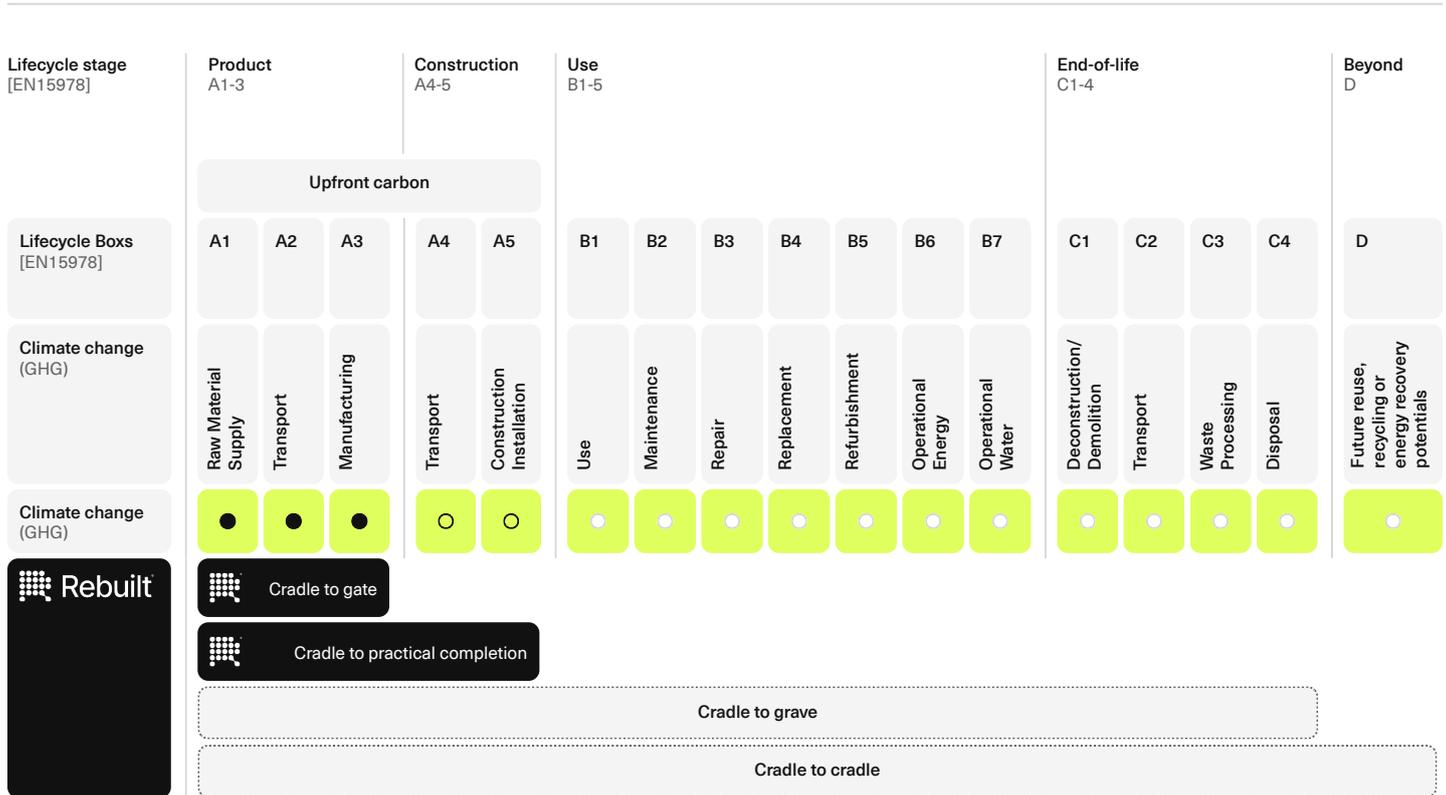

A1 - Raw Material Extraction

The raw materials stage also called background or upstream covers the extraction and production of the raw materials needed to manufacture the product. It includes the processing of the extracted raw material to the point where it can be made into a recognisable part.

A2 - Transport Raw Material to Factory

This stage outlines the calculation of CO₂ emissions (Stage A2) for transporting raw materials to the factory. It considers transport modes, distances travelled, and material weights to calculate emissions.

A3 - Manufacturing

Converting raw materials into parts and made into the final product. It considers energy usage, packaging, process emissions and production waste.

A4 - Transport to Site

Not reported as part of this scope

A5 - Construction & Installation

Not reported as part of this scope

B - Use Phase

Not reported as part of this scope

C - End of Life


Not reported as part of this scope

D - Beyond

Not reported as part of this scope

Technical information (continued)

Process flow diagram

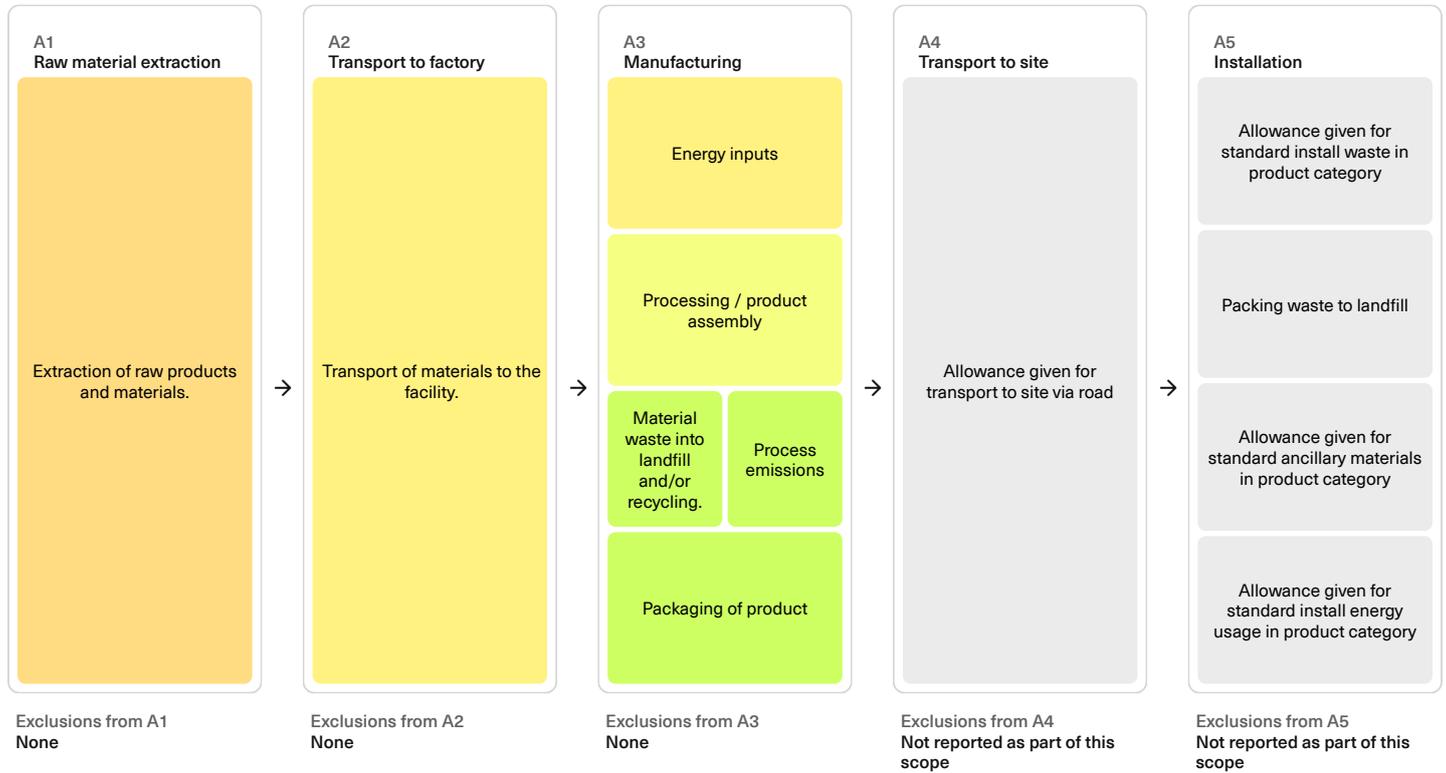

Cut-off criteria

Individual processes may be excluded if their contributions to the total system's environmental impact are less than 1%. The aggregate cut-off criteria of this PCF follows PCR 2019:14 guideline where a minimum of 95% of total input (mass and energy) for each life cycle stage are included. Exclusions from the PCF is outlined in "Data Assumptions, Choices and Limitations".

The use stage is excluded from the study due to the uncertainty related to the multiple possible applications of the products assessed.

The following processes were left out of the system boundaries, in conformity to usual practices in carbon footprinting: labor, commuting of workers and administrative work.

Allocation procedures

The allocation method for this PCF is based on a physical (mass) basis. The energy used by the product is allocated by normalising the total energy used in the factory to the total mass of the product to the total production mass output from the same factory.

Results

Total upfront carbon (Fossil)
(A1-A3)

62.39

Carbon Footprint
kg CO₂e /unit

Carbon intensity by life cycle stage

Type	A1 (kgCO ₂ e)	A2 (kgCO ₂ e)	A3 (kgCO ₂ e)
Fossil	57.47	2.57	2.36
Biogenic	-1.80	0.00	< 0.01
Luluc	0.04	0.00	< 0.01
	Total (kgCO ₂ e)	Total (kgCO ₂ e)	Total (kgCO ₂ e)
	55.71	2.57	2.36

Carbon intensity by raw material

Material	GWP Fossil (kgCO ₂ e)	GWP Biogenic (kgCO ₂ e)	GWP Luluc (kgCO ₂ e)	GWP Total (kgCO ₂ e)
Plywood in seat	1.71	-1.74	< 0.01	-0.04
Ratchet Back Bar	4.21	0.00	< 0.01	4.21
Fabric	1.20	< 0.01	< 0.01	1.20
Back Inner Plastic PPK20	3.43	-0.03	< 0.01	3.40
Gas strut	3.16	0.00	< 0.01	3.16
Back Outer Plastic	2.36	-0.02	< 0.01	2.34
Gas Dust Cover	0.39	-0.00	< 0.01	0.38
Seat Outer Plastic PP05	2.57	-0.02	< 0.01	2.55
5 Star Base	14.27	-0.00	< 0.01	14.27
Castors	5.39	< 0.01	< 0.01	5.39
Powder coating on steel components (300mm x 200mm)	0.04	0.00	< 0.01	0.04
3 Lever Mechanism - Minus Powder Coating	8.00	0.00	< 0.01	8.00
Paddles	3.00	-0.03	< 0.01	2.98
Chair Foam	7.75	0.06	0.01	7.82
	Total (kgCO ₂ e)	Total (kgCO ₂ e)	Total (kgCO ₂ e)	Total (kgCO ₂ e)
	57.47	-1.80	0.04	55.71

Carbon intensity by transport type

Material	Transport mode	GWP Fossil (kgCO ₂ e)	GWP Biogenic (kgCO ₂ e)	GWP Luluc (kgCO ₂ e)	GWP Total (kgCO ₂ e)
----------	----------------	----------------------------------	------------------------------------	---------------------------------	---------------------------------

Results (Continue)

Plywood in seat	Multi-leg transport	0.22	0.00	0.00	0.22
Ratchet Back Bar	Multi-leg transport	0.23	0.00	0.00	0.23
Fabric	Multi-leg transport	0.05	0.00	0.00	0.05
Back Inner Plastic PPK20	Multi-leg transport	0.24	0.00	0.00	0.24
Gas strut	Multi-leg transport	0.17	0.00	0.00	0.17
Back Outer Plastic	Multi-leg transport	0.16	0.00	0.00	0.16
Gas Dust Cover	Multi-leg transport	0.01	0.00	0.00	0.01
Seat Outer Plastic PP05	By road, diesel truck, 16 to 28t, fleet average	0.14	0.00	0.00	0.14
5 Star Base	Multi-leg transport	0.23	0.00	0.00	0.23
Plastic Bag	By road, diesel truck, 16 to 28t, fleet average	< 0.01	0.00	0.00	< 0.01
Castors	Multi-leg transport	0.09	0.00	0.00	0.09
Powder coating on steel components (300mm x 200mm)	Multi-leg transport	< 0.01	0.00	0.00	< 0.01
3 Lever Mechanism - Minus Powder Coating	Multi-leg transport	0.44	0.00	0.00	0.44
Paddles	Multi-leg transport	0.10	0.00	0.00	0.10
Chair Foam	Multi-leg transport	0.48	0.00	0.00	0.48
		Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
		2.57	0.00	0.00	2.57

Carbon intensity by energy source

Energy type	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Purchased from grid (low voltage)	2.32	0.00	0.00	2.32
	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
	2.32	0.00	0.00	2.32

Carbon intensity by packaging material

Material	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Plastic Bag	0.04	< 0.01	< 0.01	0.04
	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
	0.04	< 0.01	< 0.01	0.04

Carbon intensity by process emissions

Material	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)	Total (kgCO2e)
	0.00	0.00	0.00	0.00

Results (Continue)

Carbon intensity by waste treatment

Material	Waste treatment type	GWP Fossil (kgCO2e)	GWP Biogenic (kgCO2e)	GWP Luluc (kgCO2e)	GWP Total (kgCO2e)
Fabric	recycling, polyester fibre/fabric	< 0.01	< 0.01	< 0.01	< 0.01
Plywood in seat	N/A	0.00	0.00	0.00	0.00
Ratchet Back Bar	N/A	0.00	0.00	0.00	0.00
Back Inner Plastic PPK20	N/A	0.00	0.00	0.00	0.00
Gas strut	N/A	0.00	0.00	0.00	0.00
Back Outer Plastic	N/A	0.00	0.00	0.00	0.00
Gas Dust Cover	N/A	0.00	0.00	0.00	0.00
Seat Outer Plastic PP05	N/A	0.00	0.00	0.00	0.00
5 Star Base	N/A	0.00	0.00	0.00	0.00
Castors	N/A	0.00	0.00	0.00	0.00
Powder coating on steel components (300mm x 200mm)	N/A	0.00	0.00	0.00	0.00
3 Lever Mechanism - Minus Powder Coating	N/A	0.00	0.00	0.00	0.00
Paddles	N/A	0.00	0.00	0.00	0.00
Chair Foam	N/A	0.00	0.00	0.00	0.00
		Total (kgCO2e) < 0.01	Total (kgCO2e) < 0.01	Total (kgCO2e) < 0.01	Total (kgCO2e) < 0.01

References

- ISO 14040:2006+A1:2020 - Environmental management - Life cycle assessment - Principles and framework
- ISO 14044:2006+A2:2020 - Environmental management - Life cycle assessment - Requirements and guidelines
- ISO 14067:2018 (First Edition) - Greenhouse gases - Carbon footprint of products - Requirements and guidelines for quantification
- EN 15804:2012+A2:2019 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- Australian National Life Cycle Inventory Database (AusLCI) version 1.42 (May 2023)
- ecoinvent database v3.11 (November 2024)
- Australian National Greenhouse Accounts Factors 2024