



Product Carbon Footprint
Limited Assurance



ISO 14067
ISO 14064-3
EN 15804+A2
rebuilt.eco/pcf

20.42UNV

Independently Verified Product Carbon Footprint (PCF) Full Report

16 October 2025

Table of Contents

| | |
|---|-----------|
| Table of contents | 2 |
| Document overview | 3 |
| Benefits of using this Product Carbon Footprint | 3 |
| Notes for readers | 3 |
| Product Carbon Footprint results at a glance | 4 |
| Total upfront carbon (A1-A5) | 4 |
| Data confidence | 4 |
| Carbon impact (Fossil) | 4 |
| Carbon by lifecycle stage | 4 |
| Report information | 5 |
| Company information | 5 |
| Product information | 6 |
| Technical information | 7 |
| Report boundary | 7 |
| Process flow diagram | 8 |
| Results | 9 |
| Total upfront carbon (A1-A5) | 9 |
| Carbon intensity by life cycle stage | 9 |
| Carbon intensity by raw material | 9 |
| Carbon intensity by transport type | 9 |
| Carbon intensity by energy source | 9 |
| Carbon intensity by packaging material | 10 |
| Carbon intensity by process emissions | 10 |
| Carbon intensity by waste treatment | 10 |
| References | 11 |

Document overview

This Product Carbon Footprint (PCF) report provides a transparent and verified account of the greenhouse gas (GHG) emissions associated with 20.42UNV.

This report has been prepared by the declaration owner using primary and secondary data. The report conforms to international standard ISO 14067 and it is compiled using a range of high quality data sources. The results of this report has been reviewed by a suitably qualified Rebuilt LCA professional and verified in accordance to ISO 14064-3. This report demonstrates the declaration owner's commitment to transparency, sustainability excellence and continuous improvement.

Users of this PCF are responsible for evaluating the applicability of the data for their intended purposes.

Benefits of using this Product Carbon Footprint

This document can be used to:

- Inform your customers about the embodied emissions in your products
- Meet procurement and tender requirements
- Identify hot spots and opportunities for making improvements in carbon intensity over time
- Input into mandatory corporate carbon disclosure reporting.

PCFs and EPDs: making comparisons

Both Product Carbon Footprints (PCFs) and Environmental Product Declarations (EPDs) are based on lifecycle assessment methodologies (ISO 14044), so their results are technically interoperable. However, comparisons should be approached with care:

- Data sources differ. Even within the same product category, PCFs and EPDs may draw on different reference datasets, assumptions, or cut-off rules, leading to variation in results.
- Rules matter. Results are only directly comparable if they apply the same Product Category Rules (PCRs), which set the boundaries and methods for assessment.
- Timing matters. PCFs and EPDs last for five years. Assessments carried out at different times may reflect changes in datasets, methodologies, or manufacturing processes.
- Lifecycle stages vary. Not all PCFs and EPDs cover the same modules (e.g. raw materials, manufacturing, transport, use, end-of-life). Different system boundaries can significantly affect results. Use the breakdown tables to compare like-for-like.
- Detail drives accuracy. Expert interpretation is often needed to judge whether results are genuinely comparable and to avoid misleading conclusions.
- Project context is key. The most meaningful comparison comes from assessing products in the context of the whole project or structure, not in isolation.

Results at a glance

20.42UNV

NATIONAL MASONRY PTY LTD


Total upfront carbon (Fossil)
(A1-A3)

145.04

Carbon Footprint
kg CO₂e /tonne

Carbon impact (Fossil)

Relative carbon impact of the components of the product

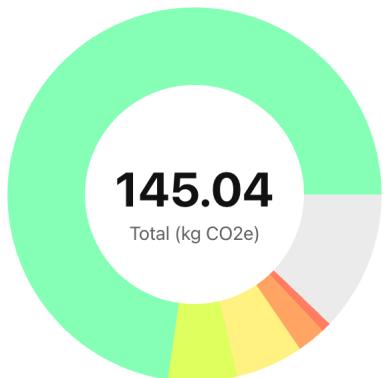

● Material 2: Cement ● Timber pallet ● Material 1: SAND
● Material 3: Aggregate ● Plastic film ● Material 4: Water ● Factory Energy

| Component name | Weight (kg) | kg CO ₂ e | % of total kg CO ₂ e |
|-----------------------|-------------|------------------------------|---------------------------------|
| Material 1: SAND | 470.63 | 8.50 | 5.86 |
| Material 2: Cement | 100.70 | 105.48 | 72.73 |
| Material 3: Aggregate | 386.71 | 3.61 | 2.49 |
| Material 4: Water | 41.96 | 0.01 | < 0.01 |
| Timber pallet | 25.00 | 8.63 | 5.95 |
| Plastic film | 0.18 | 1.17 | 0.81 |
| Factory Energy | 0.00 | 17.63 | 12.15 |
| | Total (kg) | Total (kg CO ₂ e) | |
| | 1,025.18 | 145.04 | |

Carbon intensity by life cycle stage

Carbon impact from raw materials (A1), transport to factory (A2), production activities (A3), transport to site (A4), and installation (A5).

| Type | A1 (kgCO ₂ e) | A2 (kgCO ₂ e) | A3 (kgCO ₂ e) |
|----------|-----------------------------|-----------------------------|-----------------------------|
| Fossil | 107.80 | 8.96 | 28.27 |
| Biogenic | 0.05 | 0.00 | -39.71 |
| Luluc | < 0.01 | 0.00 | 0.03 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 107.86 | 8.96 | -11.41 |

Report information

| | |
|------------------------------|---|
| Publication date | October 16, 2025 |
| Valid until | October 16, 2030 |
| Independently verified | Declaration owner generated report Reviewed and verified by Rebuilt |
| Verifier contact | www.rebuilt.eco iso@rebuilt.eco |
| Geographic scope | N/A |
| Data collection period | 1 July 2024 - 30 June 2025 |
| Standards compliance | ISO 14040, ISO 14044, ISO 14064-3, ISO 14067, ISO 14071 |
| Product Category Rules (PCR) | EN 15804+A2:2019 |

This PCF report has been created and verified in accordance with:



Company information

| | |
|------------------------|--|
| Declaration owner | NATIONAL MASONRY PTY LTD |
| Company description | National Masonry® is a leading manufacturer and reseller of Concrete Blocks, Bricks, Pavers & Retaining Walls. It is our goal to provide our valued customers with high quality products that will stand the test of time. We offer an extensive range of products to suit your requirements, whether you are an architect or someone interested in DIY. With our products, you can rest assured that your home, building, or any other infrastructure remains sturdy and resistant to damage caused by time or natural disasters. |
| Company location | - |
| Manufacturing facility | Deer Park |
| Manufacturing location | National Masonry - Victoria, Riding Boundary Rd, Deer Park VIC, Australia |

Product information

| | |
|-----------------------------------|---|
| Product name | 20.42UNV |
| SKU | 20.42UNV |
| Description | 390x190x190 Structural Masonry Block |
| Net weight (kg) per declared unit | 1,000.00 |
| Declared unit | 1 tonne |
| | For the purposes of this report, declared unit is taken to be an individual unit as sold. |
| ANZSIC | 30 |
| UNICLASS code | Pr_20_93_52_01 |

Technical information

Report boundary

This declaration shows the global warming potential (GWP) of the greenhouse gases embodied in this product, expressed in kilograms of carbon dioxide and equivalent gasses with global warming potential (kgCO₂-e) and is based on the results of a pre-verified LCA performed in accordance with ISO14067 process and procedure as well as ISO14025 and nominated PCR EN15804.

NOTE: This declaration is limited to the life cycle stages shown in the table below.

| Lifecycle stage [EN15978] | Product A1-3 | | Construction A4-5 | | Use B1-5 | | | | | | | End-of-life C1-4 | | | | Beyond D |
|--|---------------------|-----------|----------------------|-----------|---------------------------|-----|-------------|--------|-------------|---------------|--------------------|---------------------|----------------------------|-----------|------------------|-------------|
| Upfront carbon | | | | | | | | | | | | | | | | |
| Lifecycle Boxes [EN15978] | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Climate change (GHG) | Raw Material Supply | Transport | Manufacturing | Transport | Construction Installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational Energy | Operational Water | Deconstruction/ Demolition | Transport | Waste Processing | Disposal |
| Climate change (GHG) | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ● | ● | ● | ● |
|  Cradle to gate | | | | | | | | | | | | | | | | |
|  Cradle to practical completion | | | | | | | | | | | | | | | | |
| Cradle to grave | | | | | | | | | | | | | | | | |
| Cradle to cradle | | | | | | | | | | | | | | | | |

A1 - Raw Material Extraction

The raw materials stage also called background or upstream covers the extraction and production of the raw materials needed to manufacture the product. It includes the processing of the extracted raw material to the point where it can be made into a recognisable part.

A2 - Transport Raw Material to Factory

This stage outlines the calculation of CO₂ emissions (Stage A2) for transporting raw materials to the factory. It considers transport modes, distances travelled, and material weights to calculate emissions.

A3 - Manufacturing

Converting raw materials into parts and made into the final product. It considers energy usage, packaging, process emissions and production waste.

A4 - Transport to Site

Transport of the product to the final customer, including retail and warehousing. This PCF assumes products ship directly from the manufacturing plant to the final customer and are not sent to retail or warehousing. Scenario used is distance estimated at 200km by truck

A5 - Construction & Installation

Energy to install, ancillary materials required and waste created during the construction & installation of the product on site.

B - Use Phase

Not reported as part of this scope

C - End of Life

Not reported as part of this scope


D - Beyond

Not reported as part of this scope

All effort is made to align measurement procedures for PRODUCT PCR to support comparability within the normal limits of accuracy. Users should take note of the scope, limits and product rules where they attempt to compare the A1-A5 result declared here and other product declarations.

Technical information (continued)

Process flow diagram

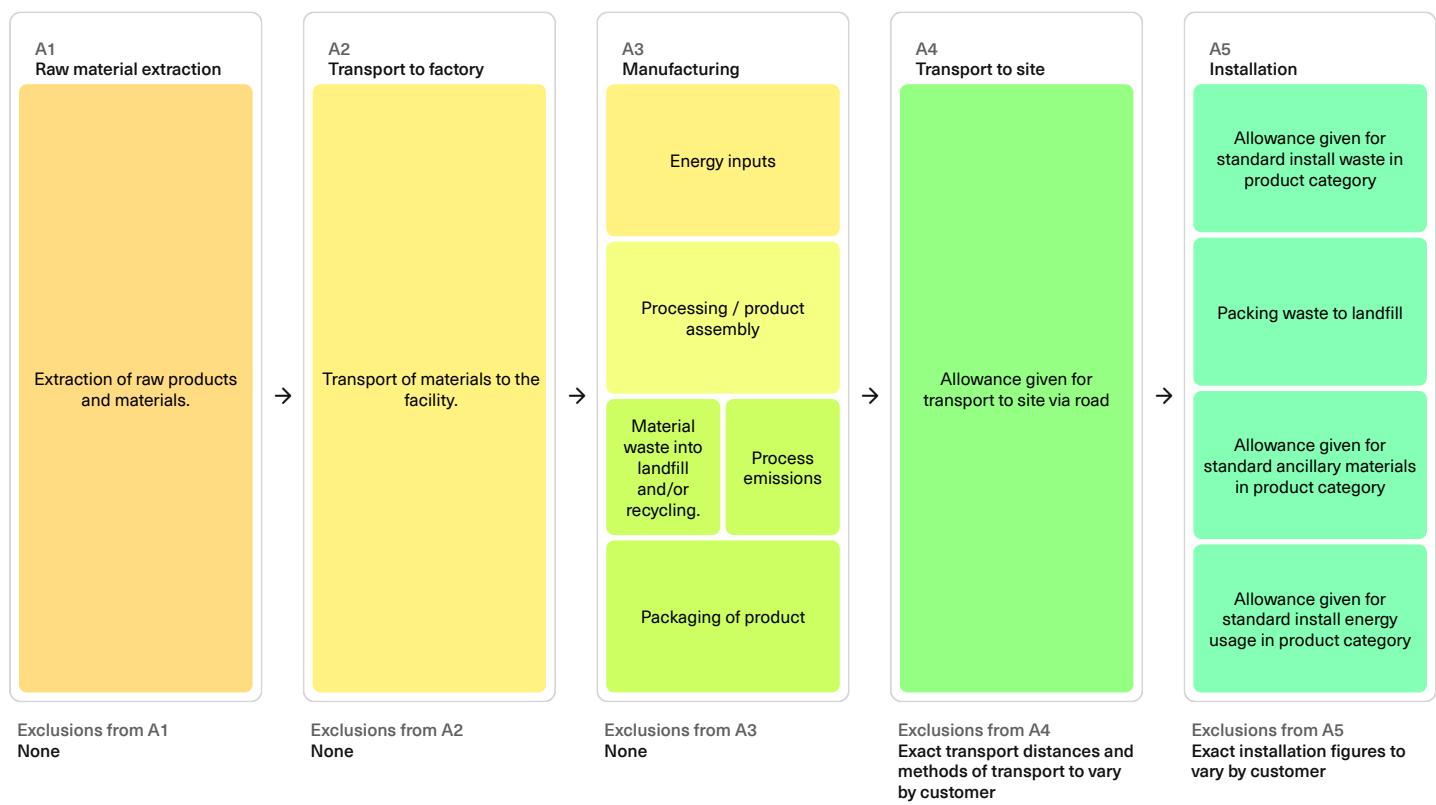

Cut-off criteria

Individual processes may be excluded if their contributions to the total system's environmental impact are less than 1%. The aggregate cut-off criteria of this PCF follows PCR 2019:14 guideline where a minimum of 95% of total input (mass and energy) for each life cycle stage are included. Exclusions from the PCF is outlined in "Data Assumptions, Choices and Limitations".

The use stage is excluded from the study due to the uncertainty related to the multiple possible applications of the products assessed.

The following processes were left out of the system boundaries, in conformity to usual practices in carbon footprinting: labor, commuting of workers and administrative work.

Allocation procedures

The allocation method for this PCF is based on a physical (mass) basis. The energy used by the product is allocated by normalising the total energy used in the factory to the total mass of the product to the total production mass output from the same factory.

Results

Total upfront carbon (Fossil)
(A1-A3)

145.04

Carbon Footprint
kg CO₂e /tonne

Carbon intensity by life cycle stage

| Type | A1 (kgCO ₂ e) | A2 (kgCO ₂ e) | A3 (kgCO ₂ e) |
|----------|-----------------------------|-----------------------------|-----------------------------|
| Fossil | 107.80 | 8.96 | 28.27 |
| Biogenic | 0.05 | 0.00 | -39.71 |
| Luluc | < 0.01 | 0.00 | 0.03 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 107.86 | 8.96 | -11.41 |

Carbon intensity by raw material

| Material | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|-----------------------|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| Material 1: SAND | 1.78 | < 0.01 | < 0.01 | 1.78 |
| Material 2: Cement | 104.04 | 0.04 | < 0.01 | 104.09 |
| Material 3: Aggregate | 1.97 | < 0.01 | < 0.01 | 1.98 |
| Material 4: Water | 0.01 | < 0.01 | < 0.01 | 0.01 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 107.80 | 0.05 | < 0.01 | 107.86 |

Carbon intensity by transport type

| Material | Transport mode | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|-----------------------|--|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| Material 1: SAND | Transport, truck, 16 to 28t, fleet average | 6.32 | 0.00 | 0.00 | 6.32 |
| Material 2: Cement | Transport, truck, 16 to 28t, fleet average | 1.35 | 0.00 | 0.00 | 1.35 |
| Material 3: Aggregate | Transport, truck, 16 to 28t, fleet average | 1.30 | 0.00 | 0.00 | 1.30 |
| Material 4: Water | N/A | 0.00 | 0.00 | 0.00 | 0.00 |
| Timber pallet | Transport, truck, 16 to 28t, fleet average | 0.08 | 0.00 | 0.00 | 0.08 |
| Plastic film | Transport, truck, 16 to 28t, fleet average | 0.01 | 0.00 | 0.00 | 0.01 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | |
| | 9.06 | 0.00 | 0.00 | 9.06 | |

Results (Continue)

Carbon intensity by energy source

| Energy type | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|------------------------------------|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| Purchased from grid (high voltage) | 14.05 | 0.00 | 0.00 | 14.05 |
| Diesel oil | 0.80 | 0.00 | 0.00 | 0.80 |
| Liquefied petroleum gas (LPG) | 2.77 | 0.00 | 0.00 | 2.77 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 17.63 | 0.00 | 0.00 | 17.63 |

Carbon intensity by packaging material

| Material | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|---------------|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| Timber pallet | 8.63 | -39.66 | 0.03 | -31.00 |
| Plastic film | 1.17 | -0.05 | < 0.01 | 1.12 |
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 9.80 | -39.71 | 0.03 | -29.88 |

Carbon intensity by process emissions

| Material | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|----------|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | 0.00 | 0.00 | 0.00 | 0.00 |

Carbon intensity by waste treatment

| Material | Waste treatment type | GWP Fossil (kgCO ₂ e) | GWP Biogenic (kgCO ₂ e) | GWP Luluc (kgCO ₂ e) | GWP Total (kgCO ₂ e) |
|-----------------------|--------------------------------------|----------------------------------|------------------------------------|---------------------------------|---------------------------------|
| Material 1: SAND | concrete (not reinforced), recycling | 0.41 | < 0.01 | < 0.01 | 0.41 |
| Material 2: Cement | concrete (not reinforced), recycling | 0.09 | < 0.01 | < 0.01 | 0.09 |
| Material 3: Aggregate | concrete (not reinforced), recycling | 0.34 | < 0.01 | < 0.01 | 0.34 |
| Material 4: Water | N/A | 0.00 | 0.00 | 0.00 | 0.00 |
| | | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) | Total (kgCO ₂ e) |
| | | 0.84 | < 0.01 | < 0.01 | 0.84 |

References

- ISO 14040:2006+A1:2020 - Environmental management - Life cycle assessment - Principles and framework
- ISO 14044:2006+A2:2020 - Environmental management - Life cycle assessment - Requirements and guidelines
- ISO 14067:2018 (First Edition) - Greenhouse gases - Carbon footprint of products - Requirements and guidelines for quantification
- EN 15804:2012+A2:2019 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- Australian National Life Cycle Inventory Database (AusLCI) version 1.42 (May 2023)
- ecoinvent database v3.11 (November 2024)
- Australian National Greenhouse Accounts Factors 2024